

InBIO 460




Security
Anytime, Anywhere...


ACCESS CONTROL PANEL CONFIGURATION



RS485

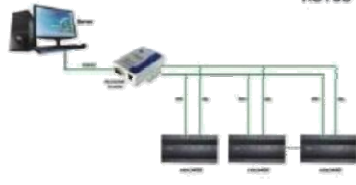

TCP/IP

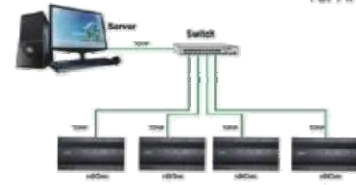

Specifications

Fingerprint Capacity: 3000
Card Capacity: 30,000
Event Buffer: 1,00,000
Power/Current: DC 9.6V-14.4V, Rated Max0.5A
Wiegand Reader Port: 4nos. (26/34bit Wiegand, 4/8bit Burst for PIN)
RS485 Reader Port: 1no. Extended Rs485 Port
Communication: RS485, TCP/IP
Baud Rate: 38,400bps (Recommended) / 9600bps, 19,200bps, 57,600bps (selectable)
Dimension: (HxWxD) 226x106x36 (single board)
 400x330x90.5 (with power supply & metal cabinet)

Address: 206, Gupta Tower-I, Block-G, Vikaspuri, New Delhi-110018

email:- info@secplus.in, Mahesh.agrahari@hotmail.com

PH:- +91 9990083309 Website: www.secplus.in